



BIN RACK

MODEL NUMBER

IBU301642

PLEASE DO NOT RETURN TO STORE

We are available to assist you in ANY way

Please contact our Service Team at:

773-475-3137 - 8:00 a.m. - 4:00 p.m. (CST)

Or

service@edsal.com



Safety Instructions



These units should be placed on a level surface. Failure to do so can result in poor product performance or create a possible safety hazard. This unit should be securely anchored to a wall or floor with suitable fasteners, which are not included. Do not use this unit for anything other than the manufacturer's intended purpose. **DO NOT STAND ON ANY PART OF THE UNIT, OR USE IT AS A LADDER.** Evenly distribute the weight on each level and always keep the heavier loads on the bottom. Use care when working with metal parts.

General Instructions

Assembly is done with the rivets of the beams and braces fitting into the slots of the post. A rubber mallet may be used on the beams and braces to seat the rivets properly. A hammer can also be used, providing one uses a cloth or a block of wood between the hammer head and the parts to prevent damage. Tap gently and be sure the rivets are straight and fully engaged.

IBU301642 3 Shelf - 33"h x 16"d x 42"w

Description	Qty.	Part Number	Part Size
A - Beams	6	RUBE4003	40 3/4"
B - Braces	4	RUBE1403	14 3/4"
C - Post	4	RCPT3305S	33"
D - Standard Wire Deck	1	WD4216	42"x16"
E - Bin Wire Deck	2	WDB4216	42"x16"
F - Bins	6	LGBINGY	N/A
G - Post Coupler	2	RMPC0409	5"

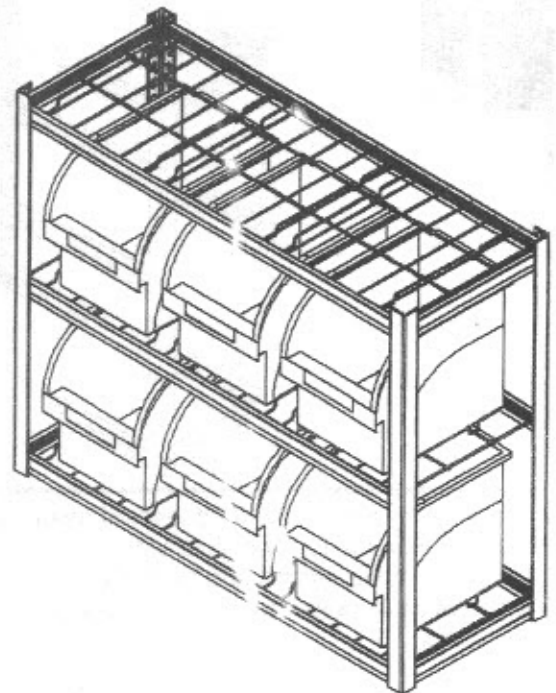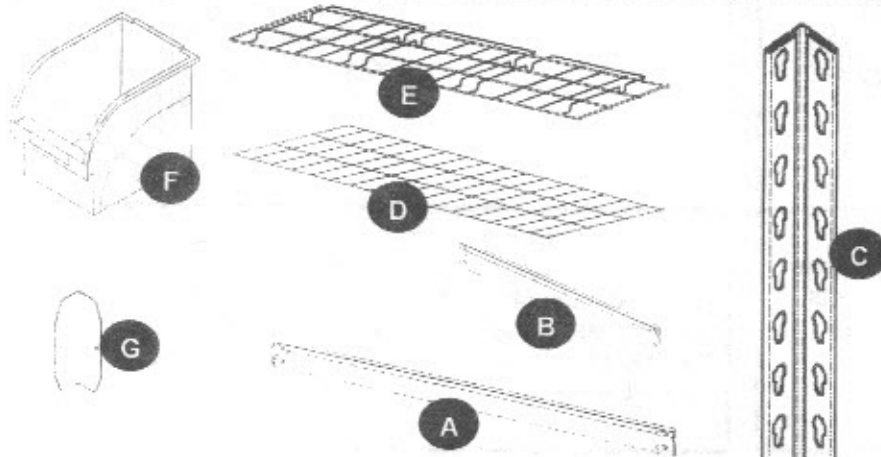

WE WILL BE GLAD TO ASSIST YOU WITH ANY ASSEMBLY, MISSING PARTS OR QUESTIONS.

To obtain replacement parts, please provide the following information :

- Model # - Part # & Description - Location Purchased - Date Purchased

Consumer Products Division
Edsal Manufacturing Company
4400 South Packers Avenue
Chicago, IL 60609

Step

1

Figure B

Note: Post are directional. The slot must point down.

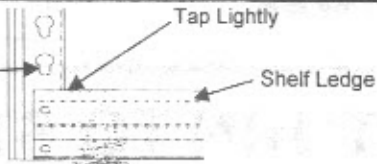


Figure A






Figure C

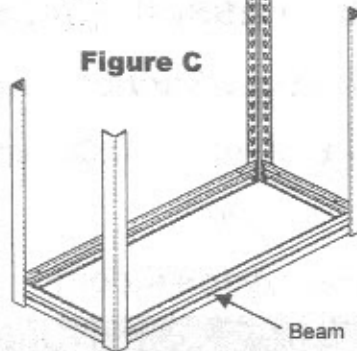

Assemble two (2) post with one (1) brace (see figure A). Place the rivets into the posts **BOTTOM TWO** slots with the slot pointing **DOWN**, and the shelf ledge facing up (see figure B). Tap lightly to seat rivets. Repeat with two (2) post and one (1) brace. Assemble the two (2) post units with two (2) beams (see figure C). Again tap lightly to seat rivets.

Step

2

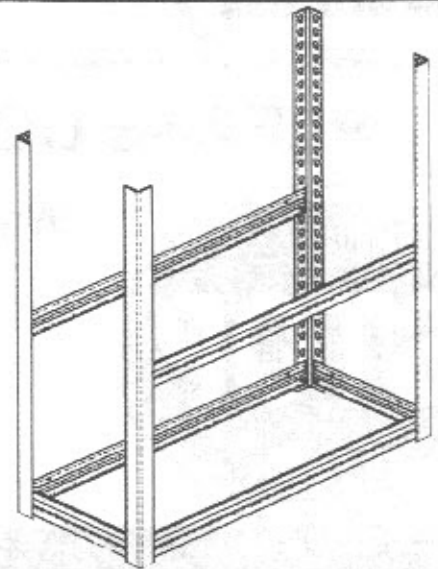


Continue by adding the second level using two (2) beams **ONLY** in the post slots **11 & 12** counting up from the **BOTTOM** of the post. Again place the rivets of the beams into the post slots with the shelf ledge facing up and tap lightly to seat the rivets.

IMPORTANT NOTE : Make sure all rivets are fully seated into the post slots.

Step


3

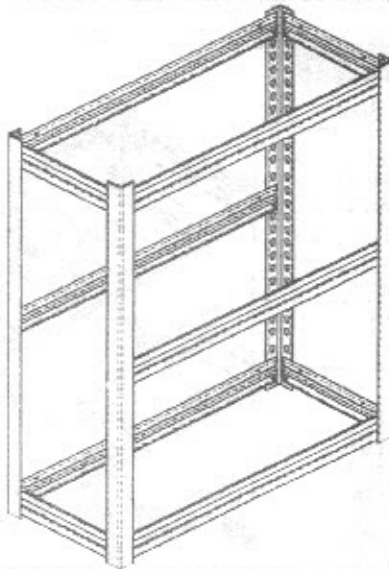

Continue by adding the third level of beams (2) and braces (2) in the top two slots of the post. Again place the rivets of the beams and braces into the post slots with the shelf ledge facing up and tap lightly to seat the rivets.

Step

4

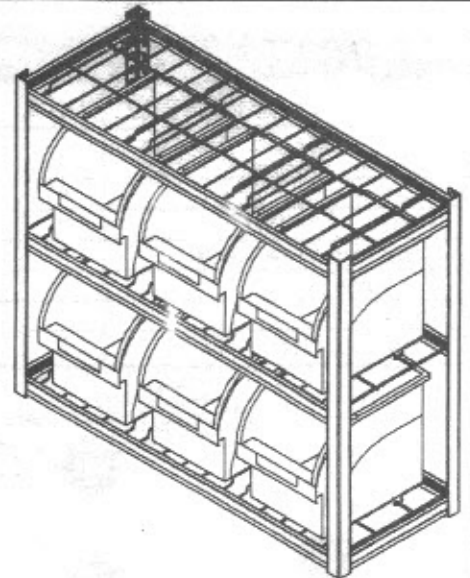

Add the bin holder wire decking to the bottom and second level. Place the standard wire decking to the top level. Add the bins to the first and second level to complete the assembly. If you purchased a second unit with the intent to stack units, please read the next page of instructions.